



# 326

## Hydraulic Excavator

# Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

## Table of Contents

<b>Specifications</b> .....	<b>2</b>
Engine .....	2
Swing Mechanism .....	2
Weights .....	2
Track .....	2
Drive .....	2
Hydraulic System .....	2
Service Refill Capacity .....	2
Standards .....	2
Sound Performance .....	2
Operating Weights and Ground Pressures .....	3
Major Component Weights .....	4
Dimensions .....	5
Working Ranges and Forces .....	6
HD Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) ...	7
Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) .....	8
SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) .....	10
Bucket Specifications and Compatibility:	
Southeast Asia .....	16
Hong Kong/Taiwan .....	17
South America (excluding Brazil) .....	18
Africa/Middle East/CIS .....	18
Attachments Offering Guide:	
Hong Kong/Taiwan .....	19
South America (excluding Brazil) .....	20
Africa/Middle East, CIS, Turkey .....	22
Southeast Asia/India/Indonesia .....	26
Australia/New Zealand .....	27
<b>Standard and Optional Equipment</b> .....	<b>29</b>
<b>Dealer Installed Kits and Attachments</b> .....	<b>31</b>
<b>Cab Options</b> .....	<b>32</b>

# 326 Hydraulic Excavator Specifications

## Engine

Engine Model	Cat® C7.1	
Net Power – ISO 9249:2007	158 kW	212 hp
Engine Power – ISO 14396:2002	159 kW	213 hp
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.01 L	428 in <sup>3</sup>

- UNECE R96 Stage IIIA emission standards, equivalent to U.S. EPA Tier 3/EU Stage IIIA.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Net power is tested per ISO 9249:2007. Standards in effect at the time of manufacture.
- Net power available at the flywheel when the engine is equipped with fan, air cleaner, muffler, and alternator with engine speed at 1,900 rpm.
- Rated speed at 1,900 rpm.

## Swing Mechanism

Swing Speed	10.5 rpm	
Maximum Swing Torque	106 kN·m	78,182 lbf-ft

## Weights

Operating Weight	25 700 kg	56,600 lb
• Long undercarriage, HD Reach boom, HD R2.95 m (9'7") stick, HD 1.54 m <sup>3</sup> (2.01 yd <sup>3</sup> ) bucket, 600 mm (24") triple grouser shoes and 4.6 mt (10,141 lb) counterweight.		
Operating Weight	28 900 kg	63,600 lb
• Long undercarriage, Super Long Reach boom, 7.85A (25'9") stick, 0.57 m <sup>3</sup> (0.75 yd <sup>3</sup> ) Ditch Cleaning bucket, 790 mm (31") triple grouser shoes and 6.7 mt (14,770 lb) counterweight.		

## Track

Optional Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	790 mm	31 in
Number of Shoes (each side)	51	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

## Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull	226 kN	50,807 lbf

## Hydraulic System

Main System – Maximum Flow – Implement	515 L/min	136 gal/min
Maximum Pressure – Equipment – Implement	35 000 kPa	5,075 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,510 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	28 400 kPa	4,118 psi
Boom Cylinder – Bore	135 mm	5 in
Boom Cylinder – Stroke	1305 mm	51 in
Stick Cylinder – Bore	140 mm	6 in
Stick Cylinder – Stroke	1660 mm	65 in
Bucket Cylinder – Bore	130 mm	5 in
Bucket Cylinder – Stroke	1156 mm	46 in

## Service Refill Capacity

Fuel Tank Capacity	474 L	125.2 gal
Cooling System	25 L	6.6 gal
Engine Oil (with filter)	25 L	6.6 gal
Swing Drive	10 L	2.6 gal
Final Drive (each)	5.5 L	1.5 gal
Hydraulic System (including tank)	310 L	81.9 gal
Hydraulic Tank (including suction pipe)	147 L	38.8 gal

## Standards

Brakes	ISO 10265: 2008
Cab/ROPS	ISO 12117-2: 2008

## Sound Performance

ISO 6395:2008 (external)	103 dB(A)
ISO 6396:2008 (inside cab)	70 dB(A)

- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at the time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

# 326 Hydraulic Excavator Specifications

## Operating Weights and Ground Pressures

	600 mm (24") Triple Grouser Shoes		700 mm (28") Triple Grouser Shoes		790 mm (31") Triple Grouser Shoes		600 mm (24") Double Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
<b>Base Frame with Track Rollers and Carrier Rollers</b>								
<b>4.6 mt (10,140 lb) Counterweight + Long Undercarriage Base Machine</b>								
HD Reach Boom + 2.95 m (9'8") HD Stick + 1.54 m <sup>3</sup> (2.01 yd <sup>3</sup> ) HD Bucket	25 700 (56,600)	51 (7.4)	26 000 (57,400)	44 (6.4)	26 400 (58,100)	40 (5.8)	25 600 (56,400)	51 (7.4)
HD Reach Boom + 2.5 m (8'2") Stick + 1.54 m <sup>3</sup> (2.01 yd <sup>3</sup> ) HD Bucket	25 500 (56,200)	51 (7.4)	25 900 (57,000)	44 (6.4)	26 200 (57,700)	40 (5.8)	25 500 (56,100)	51 (7.4)
<b>Base Machine with 6700 kg (14,771 lb) Counterweight and Long Undercarriage</b>								
<b>6.7 mt (14,770 lb) Counterweight + Long Undercarriage Base Machine</b>								
Super Long Reach Boom + Super Long Reach 9.85 m (25'9") Stick + 0.57 m <sup>3</sup> (0.75 yd <sup>3</sup> ) Ditch Cleaning Bucket	28 200 (62,100)	56 (8.2)	28 600 (62,900)	49 (7.1)	28 900 (63,600)	44 (6.4)	28 100 (62,000)	56 (8.1)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

# 326 Hydraulic Excavator Specifications

## Major Component Weights


	kg	lb
Base Machine Weight: including upperframe, undercarriage, counterweight, boom cylinders, without boom, stick, bucket, stick cylinder, bucket cylinder, tracks, without fuel, operator		
With 4.6 mt (10,140 lb) Counterweight with Long Undercarriage	17 100	37,700
With 6.7 mt (14,770 lb) Counterweight with Long Undercarriage	19 200	42,330
Track Shoes:		
600 mm (24") Width, 12.5 mm (0.49") Thick, Triple Grouser Track Shoes	3320	7,320
700 mm (28") Width, 12.5 mm (0.49") Thick, Triple Grouser Track Shoes	3670	8,090
790 mm (31") Width, 12.5 mm (0.49") Thick Triple Grouser Track Shoes with Step Extension for ISO 2867:2011	4000	8,820
600 mm (24") Width, 13 mm (0.51") Thick Double Grouser Track Shoes	3250	7,160
Two Boom Cylinders	460	1,010
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	460	1,010
Counterweights:		
4.6 mt (10,141 lb) Counterweight	4600	10,140
6.7 mt (14,771 lb) Counterweight	6700	14,770
Undercarriage:		
Long Undercarriage	5500	12,130
Booms (including lines, pins, stick cylinder):		
HD Reach Boom 6.15 m (20'2")	2180	4,810
Super Long Reach Boom 10.2 m (33'6")	3190	7,030
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
HD Reach Stick R2.95CB (9'8")	1390	3,060
Reach Stick R2.5CB (8'2")	1220	2,690
Super Long Reach Stick 7.85A (25'9")	1600	3,530
Buckets (without linkage, with tips and side-cutters):		
1.33 m <sup>3</sup> (1.74 yd <sup>3</sup> ) HD CB Linkage	1160	2,560
1.45 m <sup>3</sup> (1.90 yd <sup>3</sup> ) HD CB Linkage	1220	2,690
1.54 m <sup>3</sup> (2.01 yd <sup>3</sup> ) HD CB Linkage	1200	2,650
1.76 m <sup>3</sup> (2,30 yd <sup>3</sup> ) HD CB Linkage	1290	2,840
0.57 m <sup>3</sup> (0.75 yd <sup>3</sup> ) DC A Linkage	390	860
Quick Couplers:		
Pin Grabber QC CB with Pins	530	1,170
Pin Grabber QC CB without Pins	500	1,100

Refer to page 18 for a complete list of bucket options.

# 326 Hydraulic Excavator Specifications

## Dimensions

All dimensions are approximate and may vary depending on bucket selection.


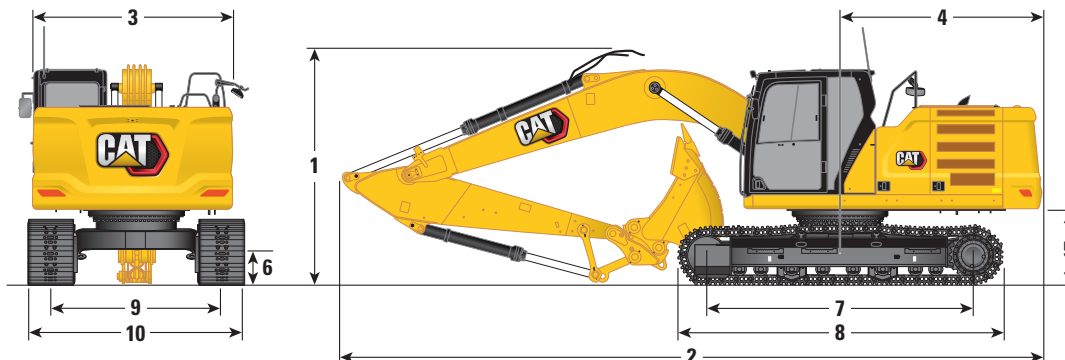


Boom Options	HD Reach Boom 5.9 m (19'4")		Super Long Reach Boom 10.2 m (33'6")			
	HD Reach Stick R2.95CB (9'8")	Reach Stick R2.5CB (8'2")	Super Long Reach Stick 7.85A (25'9")			
<b>1 Machine Height</b>						
Cab Height	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
FOGS Height	3140 mm	10'4"	3140 mm	10'4"	3140 mm	10'4"
Guardrails/Handrails Height	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
With Boom/Stick/Bucket Installed	3250 mm	10'8"	3430 mm	11'3"	3160 mm	10'4"
With Boom/Stick Installed	3120 mm	10'3"	3200 mm	10'6"	3160 mm	10'4"
With Boom Installed	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
<b>2 Machine Length:</b>						
With Boom/Stick/Bucket Installed	10 060 mm	33'0"	10 090 mm	33'1"	14 350 mm	47'1"
With Boom/Stick Installed	10 040 mm	32'11"	10 090 mm	33'1"	14 350 mm	47'1"
With Boom Installed	8720 mm	28'7"	8720 mm	28'7"	13 250 mm	43'6"
<b>3 Upperframe Width without Walkways</b>	2940 mm	9'8"	2940 mm	9'8"	2940 mm	9'8"
<b>4 Tail Swing Radius</b>	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
<b>5 Counterweight Clearance without Shoe Lug</b>	1060 mm	3'6"	1060 mm	3'6"	1060 mm	3'6"
<b>6 Ground Clearance without Shoe Lug</b>	440 mm	1'5"	440 mm	1'5"	440 mm	1'5"
<b>7 Length to Center of Rollers</b>	3830 mm	12'7"	3830 mm	12'7"	3830 mm	12'7"
<b>8 Track Length</b>	4640 mm	15'3"	4640 mm	15'3"	4640 mm	15'3"
<b>9 Track Gauge</b>	2590 mm	8'6"	2590 mm	8'6"	2590 mm	8'6"
<b>10 Undercarriage Width:</b>						
600 mm (24") Shoes	3190 mm	10'6"	3190 mm	10'6"	3190 mm	10'6"
700 mm (28") Shoes	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"
790 mm (31") Shoes	3380 mm	11'1"	3380 mm	11'1"	3380 mm	11'1"
Bucket Type	HD		HD		Ditch Cleaning	
Bucket Capacity	1.54 m <sup>3</sup>	2.01 yd <sup>3</sup>	1.54 m <sup>3</sup>	2.01 yd <sup>3</sup>	0.57 m <sup>3</sup>	0.75 yd <sup>3</sup>
Bucket Tip Radius	1660 mm	5'5"	1660 mm	5'5"	1070 mm	3'6"

# 326 Hydraulic Excavator Specifications

## Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

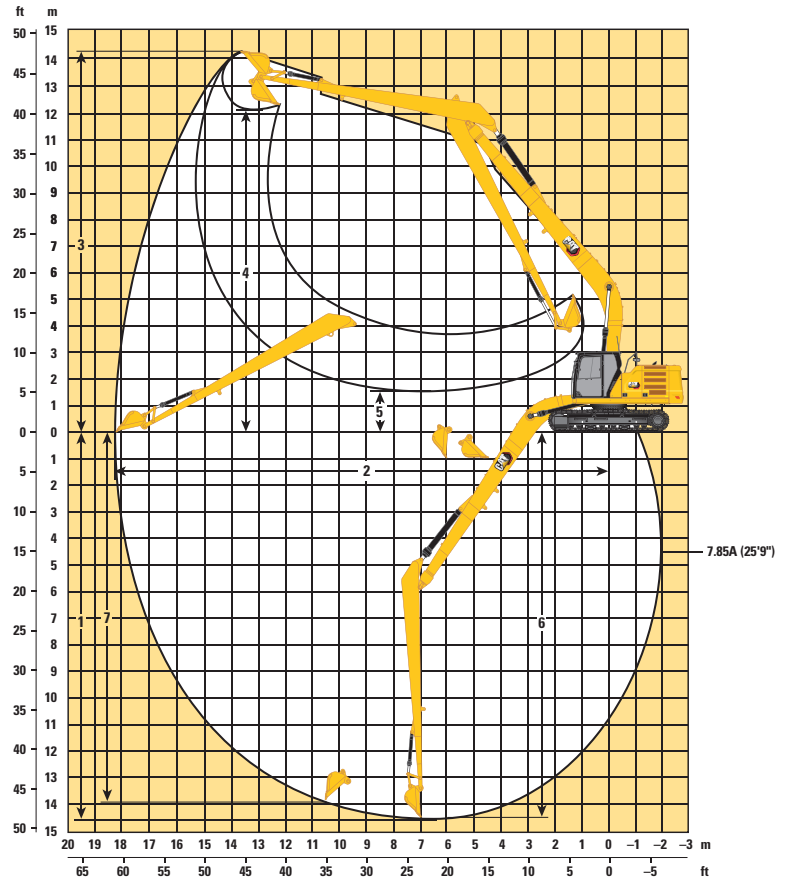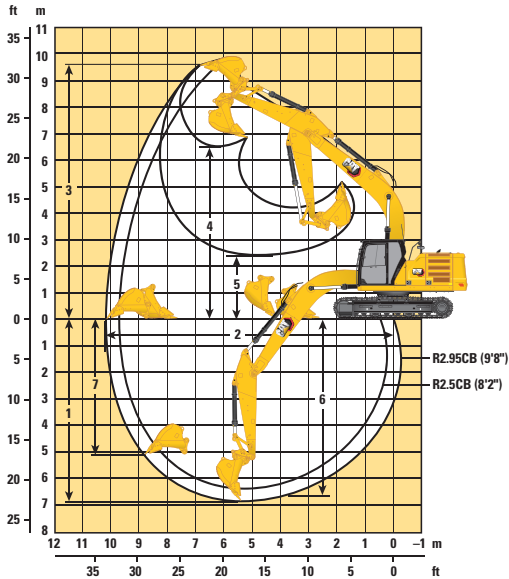

### Boom Options

### HD Reach Boom 5.9 m (19'4")

### Super Long Reach Boom 10.2 m (33'6")

### Stick Options

### HD Reach Stick R2.95CB (9'8")

### Reach Stick R2.5CB (8'2")

### Super Long Reach Stick 7.85A (25'9")

<b>1</b> Maximum Digging Depth	6820 mm	22'5"	6370 mm	20'11"	14 580 mm	47'10"
<b>2</b> Maximum Reach at Ground Line	10 120 mm	33'2"	9700 mm	31'10"	18 280 mm	60'0"
<b>3</b> Maximum Cutting Height	9640 mm	31'8"	9450 mm	31'0"	14 210 mm	46'7"
<b>4</b> Maximum Loading Height	6620 mm	21'9"	6420 mm	21'1"	12 150 mm	39'10"
<b>5</b> Minimum Loading Height	2390 mm	7'10"	2850 mm	9'4"	1500 mm	4'11"
<b>6</b> Maximum Depth Cut for 2240 mm (8'0") Level Bottom	6650 mm	21'10"	6170 mm	20'3"	14 480 mm	47'6"
<b>7</b> Maximum Vertical Wall Digging Depth	5110 mm	16'9"	4690 mm	15'5"	13 980 mm	45'10"
Bucket Digging Force (ISO)	166 kN	37,320 lbf	166 kN	37,320 lbf	61 kN	13,710 lbf
Stick Digging Force (ISO)	121 kN	27,200 lbf	141 kN	31,700 lbf	45 kN	10,120 lbf
Bucket Type	HD		HD		Ditch Cleaning	
Bucket Capacity	1.54 m <sup>3</sup>	2.01 yd <sup>3</sup>	1.54 m <sup>3</sup>	2.01 yd <sup>3</sup>	0.57 m <sup>3</sup>	0.74 yd <sup>3</sup>
Bucket Tip Radius	1660 mm	5'5"	1660 mm	5'5"	1070 mm	3'6"

# 326 Hydraulic Excavator Specifications


## HD Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On

2.95 m (9'8") 5.9 m (19'4")

HD R2.95CB1




790 mm (31") Triple Grouser Shoes














2590 mm (8'6")

3830 mm (12'7")



4640 mm (15'3")

		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*7050 *14,600	*7050 *14,600			*5850 *13,000	*5850 *13,000	6430 250
6000 mm 240 in	kg lb					*7150 *15,650	7050 15,100	*5600	4850	*5550 *12,300	4850 10,800	7510 300
4500 mm 180 in	kg lb			*9350 *20,150	*9350 *20,150	*8000 *17,350	6800 14,600	7150 15,400	4800 10,250	*5550 *12,250	4150 9,150	8180 330
3000 mm 120 in	kg lb			*11 950 *25,750	9900 21,350	*9200 *19,900	6450 13,900	7000 15,050	4650 9,950	5700 12,600	3800 8,350	8540 340
1500 mm 60 in	kg lb			*14 250 *30,750	9250 19,950	9600 20,600	6150 13,250	6850 14,700	4500 9,600	5550 12,200	3650 8,050	8610 340
0 mm 0 in	kg lb			14 950 32,000	8950 19,200	9350 20,050	5950 12,750	6700 14,400	4350 9,350	5650 12,500	3700 8,150	8420 340
-1500 mm -60 in	kg lb	*11 350 *25,700	*11 350 *25,700	14 850 31,750	8850 19,000	9250 19,850	5850 12,550	6650 14,300	4300 9,300	6150 13,550	4000 8,800	7940 320
-3000 mm -120 in	kg lb	*18 550 *42,200	17 850 38,150	*14 150 *30,650	8900 19,150	9250 19,950	5850 12,650			7250 16,050	4700 10,400	7120 280
-4500 mm -180 in	kg lb	*15 750 *33,800	*15 750 *33,800	*11 600 *24,700	9150 19,750					*8650 *18,950	6400 14,400	5790 230


## HD Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On

2.95 m (9'8") 5.9 m (19'4")

HD R2.95CB1



600 mm (24") Triple Grouser, Double Grouser Shoes














2590 mm (8'6")

3830 mm (12'7")



4640 mm (15'3")

		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*7050 *14,600	6950 *14,600			*5850 *13,000	*5850 *13,000	6430 250
6000 mm 240 in	kg lb					*7150 *15,650	6900 14,750	*5600	4750	*5550 *12,300	4750 10,550	7510 300
4500 mm 180 in	kg lb			*9350 *20,150	*9350 *20,150	*8000 *17,350	6650 14,300	7000 15,000	4650 10,000	*5550 *12,250	4050 8,950	8180 330
3000 mm 120 in	kg lb			*11 950 *25,750	9700 20,900	*9200 *19,900	6300 13,600	6850 14,700	4500 9,700	5600 12,300	3700 8,150	8540 340
1500 mm 60 in	kg lb			*14 250 *30,750	9050 19,450	9350 20,100	6000 12,900	6650 14,300	4350 9,400	5400 11,900	3550 7,800	8610 340
0 mm 0 in	kg lb			14 550 31,200	8700 18,700	9100 19,550	5800 12,450	6550 14,050	4250 9,100	5550 12,150	3600 7,950	8420 340
-1500 mm -60 in	kg lb	*11 350 *25,700	*11 350 *25,700	14 450 30,950	8600 18,500	9000 19,350	5700 12,250	6500 13,950	4200 9,050	6000 13,200	3900 8,600	7940 320
-3000 mm -120 in	kg lb	*18 550 *42,200	17 400 37,200	*14 150 *30,650	8700 18,700	9050 19,450	5700 12,300			7050 15,650	4550 10,100	7120 280
-4500 mm -180 in	kg lb	*15 750 *33,800	*15 750 *33,800	*11 600 *24,700	8950 19,250					*8650 *18,950	6250 14,050	5790 230



ISO 10567:2007






\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




# 326 Hydraulic Excavator Specifications












## HD Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*7050 *14,600	7000 14,600			*5850 *13,000	*5850 *13,000	6430 250
6000 mm 240 in	kg lb					*7150 *15,650	6950 14,950	*5600	4800	*5550 *12,300	4800 10,650	7510 300
4500 mm 180 in	kg lb			*9350 *20,150	*9350 *20,150	*8000 *17,350	6700 14,450	7100 15,200	4750 10,150	*5550 *12,250	4100 9,050	8180 330
3000 mm 120 in	kg lb			*11 950 *25,750	9800 21,100	*9200 *19,900	6400 13,750	6900 14,850	4600 9,850	5650 12,450	3750 8,250	8540 340
1500 mm 60 in	kg lb			*14 250 *30,750	9150 19,700	9450 20,350	6100 13,100	6750 14,500	4400 9,500	5500 12,050	3600 7,950	8610 340
0 mm 0 in	kg lb			14 750 31,600	8800 18,950	9250 19,850	5850 12,600	6600 14,250	4300 9,250	5600 12,300	3650 8,050	8420 340
-1500 mm -60 in	kg lb	*11 350 *25,700	*11 350 *25,700	14 650 31,350	8750 18,750	9100 19,600	5750 12,400	6550 14,150	4250 9,150	6050 13,350	3950 8,700	7940 320
-3000 mm -120 in	kg lb	*18 550 *42,200	17 650 37,700	*14 150 *30,650	8800 18,950	9150 19,700	5800 12,500			7150 15,850	4650 10,250	7120 280
-4500 mm -180 in	kg lb	*15 750 *33,800	*15 750 *33,800	*11 600 *24,700	9050 19,500					*8650 *18,950	6300 14,200	5790 230

## Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb									*7950 *17,550	7400 16,850	5860 230
6000 mm 240 in	kg lb					*7850 *17,150	7100 15,250			*7600 *16,750	5500 12,250	7040 280
4500 mm 180 in	kg lb			*10 300 *22,200	*10 300 *22,200	*8600 *18,700	6900 14,850	7300 15,650	4900 10,500	6900 15,300	4650 10,250	7750 310
3000 mm 120 in	kg lb			*12 950 *27,850	10 000 21,600	*9750 *21,150	6600 14,200	7150 15,400	4750 10,250	6350 13,950	4250 9,350	8130 320
1500 mm 60 in	kg lb			*15 000 *32,350	9500 20,400	9800 21,050	6350 13,650	7000 15,100	4650 10,000	6150 13,550	4100 9,000	8210 330
0 mm 0 in	kg lb			15 350 32,850	9250 19,900	9600 20,650	6150 13,250	6900 14,900	4550 9,800	6300 13,900	4200 9,200	8010 320
-1500 mm -60 in	kg lb	*11 700 *26,650	*11 700 *26,650	*15 250 32,800	9250 19,850	9550 20,500	6100 13,150			6900 15,250	4550 10,050	7500 300
-3000 mm -120 in	kg lb	*18 500 *40,200	*18 500 39,900	*13 750 *29,750	9350 20,100	9650 20,700	6200 13,300			8350 18,550	5450 12,100	6610 260
-4500 mm -180 in	kg lb			*10 450 *22,100	9650 20,750					*8900 *19,450	7950 17,950	5150 200



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



Lift capacity stays with ±5% for all available track shoes.












Always refer to the appropriate Operation and Maintenance Manual for specific product information.






# 326 Hydraulic Excavator Specifications












## Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb									*7950 *17,550	7250 16,500	5860 230
6000 mm 240 in	kg lb					*7850 *17,150	6950 14,950			*7600 *16,750	5350 11,950	7040 280
4500 mm 180 in	kg lb			*10 300 *22,200	*10 300 *22,200	*8600 *18,700	6750 14,500	7100 15,250	4800 10,250	6750 14,950	4550 10,050	7750 310
3000 mm 120 in	kg lb			*12 950 *27,850	9800 21,100	*9750 *21,150	6450 13,900	7000 15,000	4650 10,000	6200 13,600	4150 9,100	8130 320
1500 mm 60 in	kg lb			*15 000 *32,350	9250 19,950	9550 20,550	6200 13,300	6850 14,700	4550 9,750	6000 13,200	4000 8,750	8210 330
0 mm 0 in	kg lb			14 950 32,050	9050 19,400	9350 20,150	6000 12,950	6750 14,500	4450 9,550	6150 13,550	4050 8,950	8010 320
-1500 mm -60 in	kg lb	*11 700 *26,650	*11 700 *26,650	14 950 32,000	9000 19,350	9300 20,000	5950 12,800			6750 14,900	4450 9,750	7500 300
-3000 mm -120 in	kg lb	*18 500 *40,200	18 250 38,950	*13 750 *29,750	9100 19,600	9400 20,200	6050 13,000			8150 18,100	5300 11,800	6610 260
-4500 mm -180 in	kg lb			*10 450 *22,100	9400 20,300					*8900 *19,450	7750 17,550	5150 200

## Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb									*7950 *17,550	7300 16,650	5860 230
6000 mm 240 in	kg lb					*7850 *17,150	7050 15,100			*7600 *16,750	5450 12,100	7040 280
4500 mm 180 in	kg lb			*10 300 *22,200	*10 300 *22,200	*8600 *18,700	6800 14,700	7200 15,450	4850 10,400	6850 15,150	4600 10,150	7750 310
3000 mm 120 in	kg lb			*12 950 *27,850	9900 21,350	*9750 *21,150	6550 14,050	7100 15,200	4700 10,150	6250 13,800	4200 9,200	8130 320
1500 mm 60 in	kg lb			*15 000 *32,350	9350 20,150	9700 20,800	6250 13,500	6950 14,900	4600 9,850	6100 13,350	4050 8,900	8210 330
0 mm 0 in	kg lb			15 150 32,450	9150 19,650	9500 20,400	6100 13,100	6850 14,700	4500 9,700	6250 13,700	4150 9,050	8010 320
-1500 mm -60 in	kg lb	*11 700 *26,650	*11 700 *26,650	15 150 32,400	9100 19,600	9450 20,250	6050 13,000			6850 15,050	4500 9,900	7500 300
-3000 mm -120 in	kg lb	*18 500 *40,200	18 450 39,450	*13 750 *29,750	9250 19,850	9500 20,450	6100 13,150			8250 18,350	5400 11,950	6610 260
-4500 mm -180 in	kg lb			*10 450 *22,100	9550 20,550					*8900 *19,450	7850 17,750	5150 200



ISO 10567:2007






\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 326 Hydraulic Excavator Specifications

## SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off



Boom Length mm in	kg lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm in
12 000 mm 480 in	kg lb													*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb													*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb													*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb													*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb													*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb													*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb			*4850 *10,800	*4850 *10,800							*3250 *7,000	*3250 *7,000	*1350 *2,950	1300 2,900	17 260 680
1500 mm 60 in	kg lb			*1600 *3,650	*1600 *3,650	*5500 *12,900	*5500 *12,900	*5750 *12,400	*5750 *12,400	*4450 *9,650	*4450 *9,650	*3700 *8,000	*3700 *8,000	*1400 *3,050	1250 2,800	17 300 680
0 mm 0 in	kg lb			*1650 *3,700	*1650 *3,700	*3650 *8,400	*3650 *8,400	*6700 *14,450	5950 12,800	*5100 *11,000	4500 9,700	*4150 *8,950	3550 7,600	*1450 *3,200	1250 2,700	17 200 680
-1500 mm -60 in	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3550 *8,000	*3550 *8,000	*6550 *15,100	5450 11,750	*5600 *12,100	4150 8,900	*4500 *9,750	3250 7,050	*1550 *3,450	1250 2,700	16 970 670
-3000 mm -120 in	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6250 *14,250	5150 11,100	*5950 *12,900	3900 8,350	*4800 *10,400	3100 6,600	*1700 *3,700	1250 2,750	16 610 660
-4500 mm -180 in	kg lb	*2800 *6,250	*2800 *6,250	*3300 *7,400	*3300 *7,400	*4400 *9,950	*4400 *9,950	*6550 *14,850	5050 10,850	*6200 *13,400	3750 8,050	4900 10,500	2950 6,350	*1850 *4,100	1300 2,900	16 090 640
-6000 mm -240 in	kg lb	*3450 *7,650	*3450 *7,650	*4000 *8,950	*4000 *8,950	*5100 *11,500	*5100 *11,500	*7200 *16,350	5000 10,800	6200 13,350	3700 7,950	4800 10,350	2900 6,200	*2100 *4,600	1400 3,100	15 410 610
-7500 mm -300 in	kg lb	*4100 *9,150	*4100 *9,150	*4750 *10,700	*4750 *10,700	*5950 *13,450	*5950 *13,450	*7900 *17,050	5100 10,950	6250 13,400	3700 8,000	4800 10,400	2900 6,200	*2450 *5,400	1550 3,400	14 540 570
-9000 mm -360 in	kg lb	*4850 *10,800	*4850 *10,800	*5600 *12,600	*5600 *12,600	*7000 *15,800	*7000 *15,800	*7550 *16,300	5200 11,250	*6050 *13,050	3800 8,150	4900 10,500	2950 6,350	2900 6,450	1750 3,950	13 450 530
-10 500 mm -420 in	kg lb	*5600 *12,600	*5600 *12,600	*6600 *14,850	*6600 *14,850	*8250 *18,750	*8250 *18,150	*7000 *15,000	5400 11,700	*5650 *12,100	3950 8,500	*4650 *10,000	3050 6,650	*3200 *7,050	2150 4,800	12 080 470
-12 000 mm -480 in	kg lb			*7750 *17,500	*7750 *17,500	*7800 *16,500	*7800 *16,500	*6100 *12,900	5700 12,400	*4950 *10,450	4150 9,050	*4050 *8,450	3250 7,100	*3350 *7,400	2800 6,350	10 300 400



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

# 326 Hydraulic Excavator Specifications

## SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off (continued)



		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in		15 000 mm/600 in		16 500 mm/660 in		mm in		
12 000 mm 480 in	kg lb					*1800 *3,200	*1800 *3,200					*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb					*1950 *4,300	*1950 *4,300					*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb					*2000 *4,350	*2000 *4,350	*2050 *3,850	*2050 *3,850			*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb					*2050 *4,500	*2050 *4,500	*2050 *4,500	2000 4,250			*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb			*4,850 *4,850	*4,850 *4,850	*2150 *4,700	*2150 *4,700	*2150 *4,650	1950 4,150	*1650 1550		*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb			*2400 *5,250	*2400 *5,250	*2300 *5,000	*2300 *4,900	*2250 *4,850	1900 4,000	*2100 *3,850	1500 3,200	*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb	*2900 *6,250	*2900 *6,250	*2650 *5,750	*2650 *5,750	*2450 *5,350	2200 4,650	*2350 *5,100	1800 3,800	*2250 *4,500	1450 3,100	*1350 *2,950	1300 2,900	17 260 680
1500 mm 60 in	kg lb	*3200 *6,950	3100 6,650	*2900 *6,250	2500 5,350	*2650 *5,750	2050 4,400	*2450 *5,350	1700 3,600	2300 *4,850	1400 3,000	*1400 *3,050	1250 2,800	17 300 680
0 mm 0 in	kg lb	*3550 *7,650	2850 6,150	*3100 *6,750	2350 5,000	*2800 *6,100	1950 4,150	*2600 5,600	1600 3,450	2250 4,750	1350 2,850	*1450 *3,200	1250 2,700	17 200 680
-1500 mm -60 in	kg lb	*3800 *8,250	2650 5,700	*3350 *7,200	2200 4,700	2950 6,350	1850 3,900	2550 5,450	1550 3,300	2200 *4,300	1300 2,800	*1550 *3,450	1250 2,700	16 970 670
-3000 mm -120 in	kg lb	*4050 *8,750	2500 5,400	3400 7,300	2100 4,450	2900 6,200	1750 3,750	2500 5,300	1500 3,150	*1900 1300		*1700 *3,700	1250 2,750	16 610 660
-4500 mm -180 in	kg lb	3950 8,550	2400 5,150	3300 7,100	2000 4,300	2800 6,050	1700 3,650	2450 5,250	1450 3,100			*1850 *4,100	1300 2,900	16 090 640
-6000 mm -240 in	kg lb	3900 8,400	2350 5,050	3300 7,050	1950 4,200	2800 6,000	1700 3,600	2450 5,250	1450 3,100			*2100 *4,600	1400 3,100	15 410 610
-7500 mm -300 in	kg lb	3900 8,400	2350 5,050	3300 7,050	1950 4,250	2800 6,050	1700 3,650					*2450 *5,400	1550 3,400	14 540 570
-9000 mm -360 in	kg lb	3950 8,550	2400 5,150	3350 7,200	2000 4,350							2900 6,450	1750 3,950	13 450 530
-10 500 mm -420 in	kg lb	*3900 *8,300	2500 5,450	*3250	2150							*3200 *7,050	2150 4,800	12 080 470
-12 000 mm -480 in	kg lb											*3350 *7,400	2800 6,350	10 300 400



ISO 10567:2007






\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 326 Hydraulic Excavator Specifications

## SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off



Boom Length mm in	kg lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm in
12 000 mm 480 in	kg lb													*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb													*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb													*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb													*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb													*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb													*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb			*4850 *3,650	*4850 *3,650							*3250 *7,000	*3250 *7,000	*1350 *2,950	1300 2,800	17 260 680
1500 mm 60 in	kg lb			*1600 *3,650	*1600 *3,650	*5500 *12,900	*5500 *12,900	*5750 *12,400	*5750 *12,400	*4450 *9,650	*4450 *9,650	*3700 *8,000	*3700 *8,000	*1400 *3,050	1250 2,700	17 300 680
0 mm 0 in	kg lb			*1650 *3,700	*1650 *3,700	*3650 *8,400	*3650 *8,400	*6700 *14,450	5800 12,500	*5100 *11,000	4400 9,450	*4150 *8,950	3450 7,400	*1450 *3,200	1200 2,650	17 200 680
-1500 mm -60 in	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3550 *8,000	*3550 *8,000	*6550 *15,100	5300 11,400	*5600 *12,100	4000 8,650	*4500 *9,750	3200 6,850	*1550 *3,450	1200 2,600	16 970 670
-3000 mm -120 in	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6250 *14,250	5000 10,800	*5950 *12,900	3750 8,100	*4800 *10,400	3000 6,400	*1700 *3,700	1200 2,650	16 610 660
-4500 mm -180 in	kg lb	*2800 *6,250	*2800 *6,250	*3300 *7,400	*3300 *7,400	*4400 *9,950	*4400 *9,950	*6550 *14,850	4900 10,500	6100 13,100	3650 7,800	4750 10,200	2850 6,150	*1850 *4,100	1250 2,800	16 090 640
-6000 mm -240 in	kg lb	*3450 *7,650	*3450 *7,650	*4000 *8,950	*4000 *8,950	*5100 *11,500	*5100 *11,500	*7200 *16,350	4850 10,450	6050 13,000	3600 7,700	4700 10,100	2800 6,000	*2100 *4,600	1350 3,000	15 410 610
-7500 mm -300 in	kg lb	*4100 *9,150	*4100 *9,150	*4750 *10,700	*4750 *10,700	*5950 *13,450	*5950 *13,450	*7900 *17,050	4950 10,600	6050 13,050	3600 7,750	4700 10,100	2800 6,000	*2450 *5,400	1500 3,300	14 540 570
-9000 mm -360 in	kg lb	*4850 *10,800	*4850 *10,800	*5600 *12,600	*5600 *12,600	*7000 *15,800	*7000 *15,800	*7550 *16,300	5050 10,900	*6050 *13,050	3700 7,900	4750 10,250	2850 6,150	2800 6,300	1700 3,800	13 450 530
-10 500 mm -420 in	kg lb	*5600 *12,600	*5600 *12,600	*6600 *14,850	*6600 *14,850	*8250 *18,750	8200 17,650	*7000 *15,000	5250 11,400	*5650 *12,100	3800 8,250	*4650 *10,000	3000 6,450	*3200 *7,050	2050 4,650	12 080 470
-12 000 mm -480 in	kg lb			*7750 *17,500	*7750 *17,500	*7800 *16,500	*7800 *16,500	*6100 *12,900	5550 12,100	*4950 *10,450	4050 8,800	*4050 *8,450	3200 6,900	*3350 *7,400	2700 6,200	10 300 400



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

# 326 Hydraulic Excavator Specifications

## SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off (continued)



		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in		15 000 mm/600 in		16 500 mm/660 in		mm in		
12 000 mm 480 in	kg lb					*1800 *3,200	*1800 *3,200					*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb					*1950 *4,300	*1950 *4,300					*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb					*2000 *4,350	*2000 *4,350	*2050 *3,850	2000 *3,850			*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb					*2050 *4,500	*2050 *4,500	*2050 *4,500	1950 4,150			*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb			*4,850 *4,850	*4,850 *4,850	*2150 *4,700	*2150 *4,700	*2150 *4,650	1900 4,000	*1650 1500		*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb			*2400 *5,250	*2400 *5,250	*2300 *5,000	2250 4,800	*2250 *4,850	1800 3,850	*2100 *3,850	1450 3,100	*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb	*2900 *6,250	*2900 *6,250	*2650 *5,750	2600 5,600	*2450 *5,350	2150 4,550	*2350 *5,100	1750 3,700	*2250 *4,500	1400 3,000	*1350 *2,950	1300 2,800	17 260 680
1500 mm 60 in	kg lb	*3200 *6,950	3000 6,450	*2900 *6,250	2450 5,250	*2650 *5,750	2000 4,250	*2450 *5,350	1650 3,500	2250 4,750	1350 2,900	*1400 *3,050	1250 2,700	17 300 680
0 mm 0 in	kg lb	*3550 *7,650	2800 5,950	*3100 *6,750	2300 4,850	*2800 *6,100	1900 4,000	2550 5,450	1550 3,350	2150 4,650	1300 2,750	*1450 *3,200	1200 2,650	17 200 680
-1500 mm -60 in	kg lb	*3800 *8,250	2600 5,550	*3350 *7,200	2150 4,550	2900 6,200	1800 3,800	2450 5,250	1500 3,200	2100 *4,300	1250 2,700	*1550 *3,450	1200 2,600	16 970 670
-3000 mm -120 in	kg lb	3950 8,500	2450 5,200	3300 7,100	2000 4,300	2800 6,000	1700 3,600	2400 5,150	1450 3,050	*1900 1250		*1700 *3,700	1200 2,650	16 610 660
-4500 mm -180 in	kg lb	3850 8,300	2350 5,000	3200 6,900	1950 4,150	2750 5,900	1650 3,500	2350 5,100	1400 3,000			*1850 *4,100	1250 2,800	16 090 640
-6000 mm -240 in	kg lb	3800 8,200	2300 4,900	3200 6,850	1900 4,100	2700 5,850	1600 3,450	2350 5,100	1400 3,000			*2100 *4,600	1350 3,000	15 410 610
-7500 mm -300 in	kg lb	3800 8,200	2300 4,900	3200 6,850	1900 4,100	2750 5,900	1650 3,500					*2450 *5,400	1500 3,300	14 540 570
-9000 mm -360 in	kg lb	3850 8,300	2300 5,000	3250 7,000	1950 4,200							2800 6,300	1700 3,800	13 450 530
-10 500 mm -420 in	kg lb	*3900 *8,300	2450 5,250	*3250	2100							*3200 *7,050	2050 4,650	12 080 470
-12 000 mm -480 in	kg lb											*3350 *7,400	2700 6,200	10 300 400



ISO 10567:2007






\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 326 Hydraulic Excavator Specifications

## SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off



Boom Length mm in	kg lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm in
12 000 mm 480 in	kg lb													*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb													*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb													*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb													*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb													*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb													*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb			*4850 *3,650	*4850 *3,650							*3250 *7,000	*3250 *7,000	*1350 *2,950	1300 2,850	17 260 680
1500 mm 60 in	kg lb			*1600 *3,650	*1600 *3,650	*5500 *12,900	*5500 *12,900	*5750 *12,400	*5750 *12,400	*4450 *9,650	*4450 *9,650	*3700 *8,000	*3700 *8,000	*1400 *3,050	1250 2,750	17 300 680
0 mm 0 in	kg lb			*1650 *3,700	*1650 *3,700	*3650 *8,400	*3650 *8,400	*6700 *14,450	5850 12,650	*5100 *11,000	4450 9,550	*4150 *8,950	3500 7,500	*1450 *3,200	1250 2,700	17 200 680
-1500 mm -60 in	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3550 *8,000	*3550 *8,000	*6550 *15,100	5350 11,550	*5600 *12,100	4050 8,750	*4500 *9,750	3250 6,950	*1550 *3,450	1200 2,650	16 970 670
-3000 mm -120 in	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6250 *14,250	5100 10,950	*5950 *12,900	3850 8,250	*4800 *10,400	3050 6,500	*1700 *3,700	1250 2,700	16 610 660
-4500 mm -180 in	kg lb	*2800 *6,250	*2800 *6,250	*3300 *7,400	*3300 *7,400	*4400 *9,950	*4400 *9,950	*6550 *14,850	4950 10,700	6200 13,300	3700 7,950	4800 10,350	2900 6,250	*1850 *4,100	1300 2,850	16 090 640
-6000 mm -240 in	kg lb	*3450 *7,650	*3450 *7,650	*4000 *8,950	*4000 *8,950	*5100 *11,500	*5100 *11,500	*7200 *16,350	4950 10,650	6150 13,200	3650 7,800	4750 10,250	2850 6,100	*2100 *4,600	1400 3,050	15 410 610
-7500 mm -300 in	kg lb	*4100 *9,150	*4100 *9,150	*4750 *10,700	*4750 *10,700	*5950 *13,450	*5950 *13,450	*7900 *17,050	5000 10,750	6150 13,250	3650 7,850	4750 10,250	2850 6,150	*2450 *5,400	1550 3,350	14 540 570
-9000 mm -360 in	kg lb	*4850 *10,800	*4850 *10,800	*5600 *12,600	*5600 *12,600	*7000 *15,800	*7000 *15,800	*7550 *16,300	5150 11,050	*6050 *13,050	3750 8,050	4800 10,350	2900 6,250	2850 6,350	1750 3,850	13 450 530
-10 500 mm -420 in	kg lb	*5600 *12,600	*5600 *12,600	*6600 *14,850	*6600 *14,850	*8250 *18,750	*8250 *17,900	*7000 *15,000	5350 11,550	*5650 *12,100	3900 8,400	*4650 *10,000	3000 6,550	*3200 *7,050	2100 4,700	12 080 470
-12 000 mm -480 in	kg lb			*7750 *17,500	*7750 *17,500	*7800 *16,500	*7800 *16,500	*6100 *12,900	5650 12,250	*4950 *10,450	4100 8,950	*4050 *8,450	3200 7,000	*3350 *7,400	2750 6,300	10 300 400



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

# 326 Hydraulic Excavator Specifications

## SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off (continued)



		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in		15 000 mm/600 in		16 500 mm/660 in		mm in		
12 000 mm 480 in	kg lb					*1800 *3,200	*1800 *3,200					*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb					*1950 *4,300	*1950 *4,300					*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb					*2000 *4,350	*2000 *4,350	*2050 *3,850	2000 *3,850			*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb					*2050 *4,500	*2050 *4,500	*2050 *4,500	2000 4,200			*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb			*4,850 *4,850	*4,850 *4,850	*2150 *4,700	*2150 *4,700	*2150 *4,650	1900 4,100	*1650 1550		*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb			*2400 *5,250	*2400 *5,250	*2300 *5,000	2300 4,850	*2250 *4,850	1850 3,900	*2100 *3,850	1500 3,150	*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb	*2900 *6,250	*2900 *6,250	*2650 *5,750	*2650 *5,700	*2450 *5,350	2150 4,600	*2350 *5,100	1750 3,750	*2250 *4,500	1450 3,050	*1350 *2,950	1300 2,850	17 260 680
1500 mm 60 in	kg lb	*3200 *6,950	3050 6,550	*2900 *6,250	2500 5,300	*2650 *5,750	2050 4,350	*2450 *5,350	1700 3,550	2250 4,800	1400 2,950	*1400 *3,050	1250 2,750	17 300 680
0 mm 0 in	kg lb	*3550 *7,650	2800 6,050	*3100 *6,750	2300 4,950	*2800 *6,100	1900 4,100	2600 5,500	1600 3,400	2200 4,700	1350 2,800	*1450 *3,200	1250 2,700	17 200 680
-1500 mm -60 in	kg lb	*3800 *8,250	2650 5,650	*3350 *7,200	2150 4,650	2950 6,250	1800 3,850	2500 5,350	1500 3,250	2150 *4,300	1300 2,750	*1550 *3,450	1200 2,650	16 970 670
-3000 mm -120 in	kg lb	4050 8,650	2500 5,300	3350 7,200	2050 4,400	2850 6,100	1750 3,700	2450 5,250	1450 3,100	*1900 1250		*1700 *3,700	1250 2,700	16 610 660
-4500 mm -180 in	kg lb	3900 8,400	2350 5,100	3250 7,000	2000 4,250	2800 5,950	1650 3,550	2400 5,150	1450 3,050			*1850 *4,100	1300 2,850	16 090 640
-6000 mm -240 in	kg lb	3850 8,300	2300 5,000	3250 6,950	1950 4,150	2750 5,950	1650 3,550	2400 5,200	1450 3,050			*2100 *4,600	1400 3,050	15 410 610
-7500 mm -300 in	kg lb	3850 8,300	2300 5,000	3250 6,950	1950 4,150	2800 6,000	1650 3,600					*2450 *5,400	1550 3,350	14 540 570
-9000 mm -360 in	kg lb	3900 8,400	2350 5,100	3300 7,100	2000 4,300							2850 6,350	1750 3,850	13 450 530
-10 500 mm -420 in	kg lb	*3900 *8,300	2450 5,350	*3250	2100							*3200 *7,050	2100 4,700	12 080 470
-12 000 mm -480 in	kg lb											*3350 *7,400	2750 6,300	10 300 400



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 326 Hydraulic Excavator Specifications

## Bucket Specifications and Compatibility – Southeast Asia

		Undercarriage		Long		Long				
		Counterweight		4.6 mt (10,140 lb)		6.7 mt (14,770 lb)				
	Linkage	Width		Capacity		Weight		Fill	Reach HD	SLR
		mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb	%	R2.95 HD (9'8")	SLR
<b>Pin-On (No Quick Coupler)</b>										
General Duty	CB	1400	55	1.54	2.01	1072	2,363	100	⊙	
Heavy Duty	CB	1450	58	1.60	2.09	1269	2,797	100	⊖	
Heavy Duty	CB	1250	49	1.33	1.74	1153	2,541	100	⊙	
	CB	1400	55	1.54	2.01	1256	2,770	100	⊖	
	CB	1500	60	1.76	2.30	1378	3,038	100	X	
Ditch Cleaning	A	1200	48	0.57	0.75	364	803	100		◇
	A	1500	60	0.74	0.97	455	1,003	100		X
Maximum load with pin-on (payload + bucket)								kg	3723	955
								lb	8,208	2,105
<b>With Cat Pin Grabber Coupler</b>										
General Duty	CB	1400	55	1.54	2.01	1072	2,480	100	○	
Heavy Duty	CB	1450	58	1.60	2.09	1269	2,797	100	○	
Heavy Duty	CB	1250	49	1.33	1.74	1153	2,541	100	⊖	
	CB	1400	55	1.54	2.01	1256	2,770	100	○	
	CB	1500	60	1.76	2.30	1378	3,038	100	◇	
Maximum load with coupler (payload + bucket)								kg	3197	
								lb	7,048	

### Maximum Material Density:

- ⊙ 1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)
- ⊖ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)
- 1200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>)
- ◇ 900 kg/m<sup>3</sup> (1,500 lb/yd<sup>3</sup>)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.



# 326 Hydraulic Excavator Specifications

## Bucket Specifications and Compatibility – Hong Kong/Taiwan

		Undercarriage							Long	Long
		Counterweight							4.6 mt (10,140 lb)	6.7 mt (14,770 lb)
	Linkage	Width		Capacity		Weight		Fill	Reach HD	SLR
		mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb	%	R2.95 HD (9'8")	SLR
<b>Pin-On (No Quick Coupler)</b>										
General Duty	CB	1400	55	1.54	2.01	1072	2,363	100	⊙	
Heavy Duty	CB	1450	58	1.60	2.09	1269	2,797	100	⊖	
Heavy Duty	CB	1250	49	1.33	1.74	1153	2,541	100	⊙	
	CB	1400	55	1.54	2.01	1256	2,770	100	⊖	
	CB	1500	60	1.76	2.30	1378	3,038	100	X	
Ditch Cleaning	A	1200	48	0.57	0.75	364	803	100		◇
	A	1500	60	0.74	0.97	455	1,003	100		X
								kg	3723	955
Maximum load with pin-on (payload + bucket)								lb	8,208	2,105
<b>With Cat Pin Grabber Coupler</b>										
General Duty	CB	1400	55	1.54	2.01	1072	2,480	100	○	
Heavy Duty	CB	1450	58	1.60	2.09	1269	2,797	100	○	
Heavy Duty	CB	1250	49	1.33	1.74	1153	2,541	100	⊖	
	CB	1400	55	1.54	2.01	1256	2,770	100	○	
	CB	1500	60	1.76	2.30	1378	3,038	100	◇	
								kg	3197	
Maximum load with coupler (payload + bucket)								lb	7,048	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

### Maximum Material Density:

- ⊙ 1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)
- ⊖ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)
- 1200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>)
- ◇ 900 kg/m<sup>3</sup> (1,500 lb/yd<sup>3</sup>)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

# 326 Hydraulic Excavator Specifications

## Bucket Specifications and Compatibility – South America (excluding Brazil)

		Undercarriage		Long		Long				
		Counterweight		4.6 mt (10,140 lb)		6.7 mt (14,770 lb)				
	Linkage	Width		Capacity		Weight		Fill	Reach HD	SLR
		mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb	%	R2.95 HD (9'8")	SLR
<b>Pin-On (No Quick Coupler)</b>										
Heavy Duty	CB	1350	54	1.54	2.01	1142	2,518	100	⊖	
	CB	1450	58	1.60	2.09	1269	2,797	100	⊖	
Ditch Cleaning	A	1200	48	0.57	0.75	364	803	100		◇
	A	1500	60	0.74	0.97	455	1,003	100		X
Maximum load with pin-on (payload + bucket)								kg	3723	955
								lb	8,208	2,105

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

### Maximum Material Density:

⊖ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)

◇ 900 kg/m<sup>3</sup> (1,500 lb/yd<sup>3</sup>)

X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

## Bucket Specifications and Compatibility – Africa/Middle East/CIS

		Undercarriage		Long		Long					
		Counterweight		4.6 mt (10,140 lb)		6.7 mt (14,770 lb)					
	Linkage	Width		Capacity		Weight		Fill	Reach HD	SLR	
		mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb	%	R2.95 HD (9'8")	R2.5 (8'2")	SLR
<b>Pin-On (No Quick Coupler)</b>											
Heavy Duty	CB	1350	54	1.54	2.01	1142	2,518	100	⊖	⊙	
	A	1200	48	0.57	0.75	364	803	100		◇	
Ditch Cleaning	A	1500	60	0.74	0.97	455	1,003	100		X	
	Maximum load with pin-on (payload + bucket)								kg	3723	4334
lb									8,208	9,555	2,105

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

### Maximum Material Density:

⊙ 1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)

⊖ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)

◇ 900 kg/m<sup>3</sup> (1,500 lb/yd<sup>3</sup>)

X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – Hong Kong/Taiwan

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

### PIN-ON ATTACHMENTS

<b>Undercarriage</b>		<b>L</b>
<b>Counterweight</b>		<b>4.6 mt (10,140 lb)</b>
<b>Boom Type</b>		<b>Reach HD</b>
<b>Stick Length</b>		<b>2.95 m HD (9'8")</b>
Hydraulic Hammers	H120 GC	✓
	H120 GC S	✓
	H130 GC	✓
	H130 GC S	✓

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – South America (excluding Brazil)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match     
  \* Working range front only     
  1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)     
  1200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>)

### PIN-ON ATTACHMENTS

Undercarriage		L
Counterweight		4.6 mt (10,140 lb)
Boom Type		Reach HD
Stick Length		2.95 m HD (9'8")
Hydraulic Hammers	H120 GC	✓
	H120 GC Side Mount	✓
	H120 GC S	✓
	H120 S	✓
	H130 GC	✓
	H130 GC Side Mount	✓
	H130 GC S	✓
	H130 S	✓
	H140 S	✓
	Multi-Processors	MP318 Concrete Cutter Jaw
MP318 Demolition Jaw		✓
MP318 Pulverizer Jaw		✓
MP318 Shear Jaw		✓
MP318 Universal Jaw		✓
MP324 Concrete Cutter Jaw		✓
MP324 Demolition Jaw		✓
MP324 Pulverizer Jaw		✓
MP324 Shear Jaw		✓
MP324 Tank Shear Jaw		✓
Demolition and Sorting Grapples	G324	✓
Mobile Scrap and Demolition Shears	S3025	✓
	S3025 Flat Top	✓
	S3035	✓*
Pulverizers	P215	✓
	P225	✓
Orange Peel Grapples	GSH425-750	●
	GSH425-950	●
	GSH425-1150	○
	GSH440-1150	○
	GSH525-750	●
	GSH525-950	●
	GSH525-1150	○

(continued on next page)

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – South America (excluding Brazil) *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		L
Counterweight		4.6 mt (10,140 lb)
Boom Type		Reach HD
Stick Length		2.95 m HD (9'8")
Hydraulic Hammers	H120 GC	✓
	H120 GC Side Mount	✓
	H120 GC S	✓
	H120 S	✓
	H130 GC	✓
	H130 GC Side Mount	✓
	H130 GC S	✓
	H130 S	✓
	H140 S	✓
	Multi-Processors	MP318 Concrete Cutter Jaw
MP318 Demolition Jaw		✓
MP318 Pulverizer Jaw		✓
MP318 Shear Jaw		✓
MP318 Universal Jaw		✓
MP324 Concrete Cutter Jaw		✓*
MP324 Demolition Jaw		✓*
Demolition and Sorting Grapples	G324	✓*
	Mobile Scrap and Demolition Shears	S3025
		S3025 Flat Top
Pulverizers	P215	✓
	P225	✓*

### BOOM-MOUNT ATTACHMENTS

Undercarriage		L
Counterweight		4.6 mt (10,140 lb)
Boom Type		Reach HD
Mobile Scrap and Demolition Shears	S2050	✓
	S3050	✓

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – Africa/Middle East, CIS, Turkey

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

No Match

### PIN-ON ATTACHMENTS

Undercarriage		L	
Counterweight		4.6 mt (10,140 lb)	
Boom Type		Reach HD	
Stick Length		2.5 m (8'2")	2.95 m HD (9'8")
Hydraulic Hammers	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓	✓
	MP324 Demolition Jaw	✓	✓
	MP324 Pulverizer Jaw	✓	✓
	MP324 Shear Jaw	✓	✓
	MP324 Tank Shear Jaw	✓	✓
	MP324 Universal Jaw	✓	✓
Demolition and Sorting Grapples	G324	✓	✓
	G324 WH-1500	✓	✓
	G324 WH-1800	✓	✓*
	G324 WH-2000	✓	
	G324 WH	✓	✓*
Mobile Scrap and Demolition Shears	S3025	✓	✓
	S3025 Flat Top	✓	✓
	S3035	✓	✓*
	S3035 Flat Top	✓	

(continued on next page)

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – Africa/Middle East, CIS, Turkey (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match
  No Match
  1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)
  1200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>)

### PIN-ON ATTACHMENTS (continued)

Undercarriage		L	
Counterweight		4.6 mt (10,140 lb)	
Boom Type		Reach HD	
Stick Length		2.5 m (8'2")	2.95 m HD (9'8")
Pulverizers	P215	✓	✓
	P225	✓	✓
Crushers	P315	✓	✓
	P325	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Orange Peel Grapples	GSH425-750	●	●
	GSH425-950	●	●
	GSH425-1150	●	○
	GSH440-1150	○	○
	GSH525-750	●	●
	GSH525-950	●	●
	GSH525-1150	○	○
	GSV525-600	●	●
	GSV525-750	●	●
	GSV525-950	●	●
	GSV525-1150	●	○
Hydraulic Transfer Grab	CTV15-1000	●	●
	CTV15-1200	●	●
	CTV15-1500	○	○
	CTV15-1700	○	○
	CTV15-1900	○	
	CTV20-1300	○	○
	CTV20-1500	○	○
	CTV20-1700	○	

(continued on next page)

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – Africa/Middle East, CIS, Turkey (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match       \* Working range front only       No Match

### CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		L	
Counterweight		4.6 mt (10,140 lb)	
Boom Type		Reach HD	
Stick Length		2.5 m (8'2")	2.95 m HD (9'8")
Hydraulic Hammers	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
	Multi-Processors	MP318 Concrete Cutter Jaw	✓
MP318 Demolition Jaw		✓	✓
MP318 Pulverizer Jaw		✓	✓
MP318 Shear Jaw		✓	✓
MP318 Universal Jaw		✓	✓
MP324 Concrete Cutter Jaw		✓	✓*
MP324 Demolition Jaw		✓	✓*
MP324 Pulverizer Jaw		✓*	
MP324 Shear Jaw		✓	✓*
MP324 Tank Shear Jaw		✓	
MP324 Universal Jaw		✓	
Demolition and Sorting Grapples		G324	✓
	G324 WH-1500	✓	
	G324 WH	✓	
Mobile Scrap and Demolition Shears	S3025	✓	✓
	S3025 Flat Top	✓	✓
Pulverizers	P215	✓	✓
	P225	✓	✓*
Crushers	P315	✓	✓
	P325	✓	✓*
Compactors (Vibratory Plate)	CVP110	✓	✓

(continued on next page)



# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – Africa/Middle East, CIS, Turkey (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match       \* Working range front only       No Match

### CW-40 DEDICATED COUPLER ATTACHMENTS

Undercarriage		L	
Counterweight		4.6 mt (10,140 lb)	
Boom Type		Reach HD	
Stick Length		2.5 m (8'2")	2.95 m HD (9'8")
Hydraulic Hammers	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
	Multi-Processors	MP318 Concrete Cutter Jaw	✓
MP318 Demolition Jaw		✓	✓
MP318 Pulverizer Jaw		✓	✓
MP318 Shear Jaw		✓	✓
MP318 Universal Jaw		✓	✓
MP324 Concrete Cutter Jaw		✓	✓
MP324 Demolition Jaw		✓	✓
MP324 Pulverizer Jaw		✓	✓
MP324 Shear Jaw		✓	✓
MP324 Tank Shear Jaw		✓	✓
MP324 Universal Jaw		✓	✓
Demolition and Sorting Grapples		G324	✓
	G324 WH-1500	✓	✓
	G324 WH-1800	✓	
	G324 WH-2000	✓*	
	G324 WH	✓*	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓
	S3025 Flat Top	✓	✓
	S3035	✓*	
	S3035 Flat Top	✓*	
Pulverizers	P215	✓	✓
	P225	✓	✓
Crushers	P315	✓	✓
	P325	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓

### BOOM-MOUNT ATTACHMENTS

Undercarriage		L	
Counterweight		4.6 mt (10,140 lb)	
Boom Type		Reach HD	
Mobile Scrap and Demolition Shears	S2050	✓	
	S3050		✓

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – Southeast Asia/India/Indonesia

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

### PIN-ON ATTACHMENTS

<b>Undercarriage</b>		<b>L</b>
<b>Counterweight</b>		<b>4.6 mt (10,140 lb)</b>
<b>Boom Type</b>		<b>Reach HD</b>
<b>Stick Length</b>		<b>2.95 m HD (9'8")</b>
Hydraulic Hammers	H120 GC	✓
	H120 GC S	✓
	H120 S	✓
	H130 GC	✓
	H130 GC S	✓
	H130 S	✓
	H140 S	✓
	Compactor	CVP110

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – Australia/New Zealand

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

No Match

### PIN-ON ATTACHMENTS

Undercarriage		L		
Counterweight		4.6 mt (10,140 lb)		
Boom Type		Reach		Reach HD
Stick Length		2.5 m (8'2")	2.95 m (9'8")	2.95 m HD (9'8")
Hydraulic Hammers	H120 GC	✓	✓	✓
	H120 GC S	✓	✓	✓
	H120 S	✓	✓	✓
	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	
	H160 GC S	✓	✓	
Demolition and Sorting Grapples	G324	✓	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓	✓
	S3035	✓	✓	✓*

(continued on next page)

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide – Australia/New Zealand (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match       \* Working range front only       No Match

### CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		L		
Counterweight		4.6 mt (10,140 lb)		
Boom Type		Reach		Reach HD
Stick Length		2.5 m (8'2")	2.95 m (9'8")	2.95 m HD (9'8")
Hydraulic Hammers	H120 GC	✓	✓	✓
	H120 GC S	✓	✓	✓
	H120 S	✓	✓	✓
	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓*		
	H160 GC S	✓	✓	
	Demolition and Sorting Grapples	G324	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓	✓
	S3035	✓*		

### BOOM-MOUNT ATTACHMENTS

Undercarriage		L		
Counterweight		4.6 mt (10,140 lb)		
Boom Type		Reach		Reach HD
Mobile Scrap and Demolition Shears	S2050	✓		✓
	S3050	✓		✓

# 326 Standard and Optional Equipment

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>CAT TECHNOLOGY</b>			<b>ENGINE</b>		
Cat Product Link™	✓		Three selectable modes: Power, Smart, Eco	✓	
Work tool recognition	✓		Auto engine speed control	✓	
Cat Grade with 2D*	✓		Auto engine idle shutdown	✓	
Cat Grade with Advanced 2D*		✓	4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓	
Cat Grade with 3D connectivity*: – Virtual Reference Station** – Internet Base Service Station** – Trimble Connected Community**		✓	52° C (125° F) high-ambient cooling capacity with derate	✓	
Cat Assist*: – Boom Assist – Bucket Assist – Swing Assist – Grade Assist – Lift Assist	✓		–18° C (0° F) cold start capability	✓	
Cat Payload*: – Static weigh – Semiautomatic calibration – Payload information – USB reporting capability	✓		–32° C (–25° F) cold start capability		✓ <sup>1</sup>
2D E-Fence*: – E-Ceiling – E-Floor – E-Swing – E-Wall – E-Cab Avoidance	✓		Sealed double element air filter with integrated precleaner	✓	
Auto Hammer Stop	✓		Cold start block heaters		✓ <sup>2</sup>
Auto Dig Boost	✓		2 × 115 amp dual alternator	✓	
Remote Services capability	✓		Electric fuel priming pump	✓	
			Two-stage fuel filtration system with water separator and indicator	✓	
			Electric cooling fans with auto- reverse function	✓	
			Biodiesel capability (up to B20)	✓	
			<b>HYDRAULIC SYSTEM</b>		
			Electronic main control valve	✓	
			Tandem type electronic main pump	✓	
			Boom and stick regeneration circuits	✓	
			Automatic hydraulic warm up	✓	
			Automatic two-speed travel	✓	
			Boom and stick drift reduction valve	✓	
			Boom and stick lowering check valves		✓
			Hammer return filter circuit		✓
			Combined tool control (two pump, one/two way high-pressure flow)		✓
			Element type main hydraulic filter	✓	

\*Optional on machines equipped with a Super Long Reach boom.

\*\*Subscription required.

<sup>1</sup> Africa and Middle East, CIS, South America (excluding Brazil) only.

<sup>2</sup> CIS only.

(continued on next page)

# 326 Standard and Optional Equipment

## Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>UNDERCARRIAGE AND STRUCTURES</b>			<b>ELECTRICAL SYSTEM</b>		
Segmented track guiding guards	✓		Two 1,000 CCA maintenance-free batteries	✓	
Swivel guard	✓		Programmable time-delay LED working lights	✓	
Bottom guard		✓	LED chassis light, left-hand/right-hand boom lights, cab light – 850 lumens	✓	
HD bottom guard	✓		Premium surround lighting package		✓
Travel motor guard	✓		Centralized electrical disconnect switch	✓	
HD travel motor guard		✓	<b>SERVICE AND MAINTENANCE</b>		
Grease lubricated track	✓		Side entry to service platform	✓	
Swing drive and motor, swing bearing for higher swing torque	✓		Remote flash and remote trouble shoot	✓	
4.6 mt (10,141 lb) counterweight	✓		Grouped location of engine oil and fuel filters	✓	
6.7 mt (14,771 lb) counterweight		✓ <sup>3</sup>	Sampling ports for Scheduled Oil Sampling (S·O·S <sup>SM</sup> )	✓	
600 mm (24") triple grouser track shoes	✓ <sup>4</sup>		Ground-level and platform-level engine oil dipsticks	✓	
700 mm (28") triple grouser track shoes		✓ <sup>5</sup>	Electric refueling pump with auto shutoff		✓
790 mm (31") triple grouser track shoes		✓	<b>SAFETY AND SECURITY</b>		
600 mm (24") double grouser track shoes		✓ <sup>6</sup>	Travel alarm		✓ <sup>14</sup>
Tie-down points on base frame (ISO 15818:2017 Compliant)	✓		Rearview and right-hand-sideview cameras	✓	
<b>BOOMS, STICKS AND LINKAGES</b>			Ground-level engine shutoff switch	✓	
5.9 m (19'4") HD Reach boom	✓		Right-hand handrail and hand hold	✓	
10.2 m (33'6") Super Long Reach boom		✓ <sup>7</sup>	Signaling/warning horn	✓	
2.95 m (9'8") HD Reach stick, CB1 linkage	✓		Service platform with anti-skid plate and countersunk bolts	✓	
2.5 m (8'2") Reach stick, CB1 linkage		✓ <sup>8</sup>	Hydraulic lock out lever neutralizes all controls	✓	
7.85 m (25'9") Super Long Reach stick, A linkage		✓ <sup>9</sup>	<sup>3</sup> All regions except Hong Kong, Taiwan. <sup>4</sup> All regions except South America (excluding Brazil). <sup>5</sup> All regions except Hong Kong, Taiwan, Africa and Middle East. <sup>6</sup> Hong Kong, Taiwan, South America (excluding Brazil) only. <sup>7</sup> All regions except Hong Kong, Taiwan. <sup>8</sup> Africa and Middle East, CIS only. <sup>9</sup> All regions except Hong Kong, Taiwan. <sup>10</sup> All regions except CIS. <sup>11</sup> All regions except Hong Kong, Taiwan, South America (excluding Brazil). <sup>12</sup> All regions except Hong Kong, Taiwan and CIS. <sup>13</sup> All regions except Hong Kong, Taiwan, South America (excluding Brazil). <sup>14</sup> Standard South America (excluding Brazil), Indonesia, Hong Kong, Taiwan, India; Optional Southeast Asia, Pacific, CIS, Africa and Middle East.		
Bucket linkage, CB1 family with lifting eye Cat Grade	✓ <sup>10</sup>				
Bucket linkage, CB1 family without lifting eye Cat Grade		✓ <sup>11</sup>			
Bucket linkage, A family with lifting eye, Super Long Reach, Cat Grade		✓ <sup>12</sup>			
Bucket linkage, A family without lifting eye, Super Long Reach, Cat Grade		✓ <sup>13</sup>			

## Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

### CAB

- Right-hand electrical pedal (two-way) for tool control
- Radial lower wiper windshield (for comfort and deluxe cab only)
- Dual exit rear window kit (Canadian regulation)
- Rain protector plus cab light cover
- Polycarbonate roof hatch (for comfort cab only)
- Front windshield laminated glass (P5A glass, EU demolition regulation)

### SAFETY AND SECURITY

- 76 mm (3") retractable seat belt
- Universal key fob

### SERVICE AND MAINTENANCE

- Grease gun holder

### GUARDS

- HD swivel guard
- Side rubber bumper guard
- Falling object guard system (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Cab vandalism guard
- Stick IMU sensor cover kit

### ELECTRICAL

- Jump start wiring

# 326 Cab Options

## Cab Options

	Comfort	Deluxe
ROPS, standard sound suppression	●	●
High-resolution 203 mm (8") LCD touch screen monitor	●	●
High-resolution 254 mm (10") LCD touch screen monitor	○	○
Automatic bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
Height-adjustable console, three steps with tool	●	X
Height-adjustable console, infinite with no tool	X	●
Fixed left-side console	●	X
Tilt-up left-side console	X	●
Mechanically adjustable seat suspension	●	X
Heated seat with air-adjustable suspension	X	●
51 mm (2") seat belt	●	●
Bluetooth® integrated radio with USB ports	●	●
12V DC outlets (×2)	●	●
Document storage	●	●
Cup and bottle holders	●	●
Openable two-piece front window	●	●
Upper radial wiper with washer	●	●
Openable steel hatch	●	X
Openable polycarbonate skylight hatch	X	●
LED dome and lower interior lights	●	●
Roller front sunscreen	●	●
Roller rear sunscreen	○	○
Rear window emergency exit	●	●
Washable floor mat	●	●
Beacon ready	●	●

- Standard
- Optional
- X Not available

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2020 Caterpillar  
All rights reserved

AEXQ2556-01 (10-2020)  
Replaces AEXQ2556  
Build Number: 07B  
(Afr-ME, CIS, S Am  
[except Brazil], SE Asia)

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

